# **SmallRig**



CT195 Video Tripod Kit
User Manual

In order to ensure user's safety and prevent damages to the product due to any improper use, please carefully read the "Warnings" below and properly keep this User Manual for future reference.

# Warnings

- Do not overload use.
- Brutal operation is strictly prohibited to avoid damage to the head.
- Make sure the device is securely attached before operating the video head.
- Do not move the tripod when the device is attached.
- Do not use in an environment with a temperature lower than minus 15 degrees or higher than 70.
- Do not leave the product expose to the sun for a long time.
- It is forbidden to inject petroleum preparations, lubricants, and corrosive substances into the head. Please use standard lubricating oil or grease if needed.
- For personal safety, please stay away from high-voltage equipment or strong chemicals when using.

#### In the Box

The package includes the following items:



### **Product Details**

1 Quick release plate

Vertical shooting button
 Tilt Knob

4 Spirit level

5 Panoramic locking knob 6 1/4"-20 screw

7 Handle telescopic locking knob

8 Base

9 Platform locking knob

10 Direction button

III Grip handle angle adjusting locking knob











# Specifications



















4104 ф45тт 103mm 103mm 150mm 90 degrees down 0.55kg 5kg 4104 φ1.77in 4.06in 4.06in 5.91in 90 degrees up 1.21lbs 11.0lbs

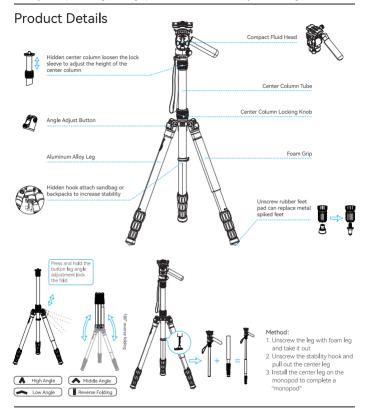

# Specifications



<sup>\*</sup> All the specifications are measured without a ball head.

# **SmallRig**



CT195 竖拍视频三脚架套件

为了保障使用者的安全以及防止不当使用导致产品损坏,请在使用前仔细阅读本手册的"重要提示",并妥善保管好手册资料,以备随时查阅。

#### 重要提示

- 请勿超负荷使用。
- 严禁野蛮操作, 以免损坏云台。
- 在使用本产品时请在锁紧主体的安全状态下操作。
- 禁止搭载设备(相机)一起携带移动。
- 请勿在低于零下15摄氏度及高于70摄氏度的温度下操作。当处于潮湿、泥沙、风尘环境时,使用 完毕后一定要将云台用干布(可以的话用无水酒精或消毒酒精)擦洗干净,有海水时不推荐使用。
- 请勿将产品在阳光下长时间放置、避免产品靠在汽车玻璃旁经历高温长达数小时。
- 禁止向球台内注入任何石油制剂,润滑剂及腐蚀性物质。产品无需配备润滑剂,如在某些情况下必需使用时,请使用标准润滑油或油脂。
- 为了人身安全, 在使用产品时请勿与带电物品以及高压设备或强效化学用品接触。

### 包装清单

包装内包含以下物品:



### 产品介绍

1 快装板

2 竖拍按钮

3 俯仰锁紧旋钮

4 水平器

5 全景锁紧旋钮

6 1/4"-20 螺丝


7 握把伸缩锁紧旋钮

8 底座

9 平台锁紧旋钮

10 快装板方向切换按钮

11 握把角度调节锁紧旋钮











## 产品参数

















4104

φ45mm

103mm

103mm

150mm

俯90°/仰90°

0.55kg

5kg



## 产品参数

