


SmallRig

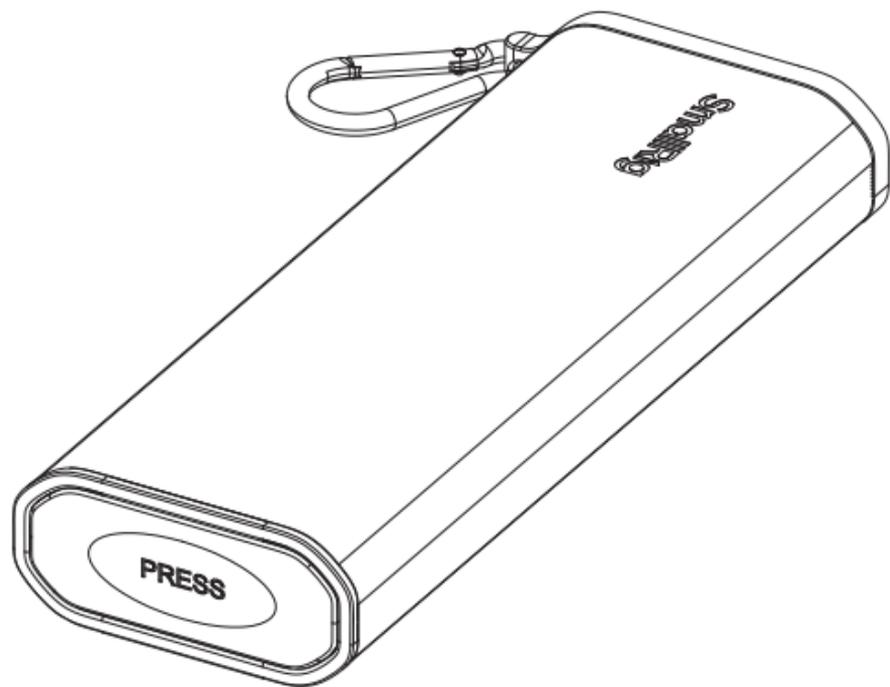

Multifunctional Card Reader (A / B)
多功能读卡器 (A / B)
(5361 / 4532)

Operating Instruction / 操作指引

- Thank you for purchasing SmallRig's product.
感谢您购买 SmallRig 产品。
- Please read this Operating Instruction.
使用本产品之前，请仔细阅读操作指引。
- Please follow the safety warnings.
请注意所有警告提示并遵循使用操作指引的所有指令。


Precautions / 注意事项

- 1.Speed throttles if host USB-C port is below USB 3.2 Gen2.
当您的设备USB-C接口为低于 USB3.2 Gen2协议时，传输速度将被限制
- 2.Ensure correct card orientation before insertion.
插入存储卡之前，请确存储卡的方向正确
- 3.Card priority: When reading SD + Micro SD simultaneously, bandwidth prioritizes the higher-speed card.
SD与Micro SD (TF) 两类卡同时读取时，如SD卡速度版本比Micro SD (TF) 卡速度版本高时，读写速度优先分配给SD卡；反之，如SD卡速度版本等于或低于Micro SD (TF) 卡速度版本时，则读写速度优先分配给Micro SD (TF) 卡
- 4.Operating Temp: -10°C to 50°C (14°F to 122°F) / 工作温度: -10°C~50°C
Storage Temp: -20°C to 65°C (-4°F to 149°F) / 储存环境: -20°C~65°C
- 5.Avoid inserting / removing other cards during data transfer to prevent data loss.
请勿在内存卡数据传输过程中进行其他内存卡插拔读写，避免造成数据丢失
- 6.Do not plug / unplug the auxiliary USB-C power during transfer, as PD protocol variations may interrupt transmission.
数据传输过程中不要拔插USB-C辅助供电接口。因不同设备PD协议不同，供电方式切换可能会引起传输中断
- 7.Mobile phone / tablet use: Keep file manager active in background to avoid interruptions.
手机或平板使用时，需要允许文件管理器保持后台运行，以免手机或平板关闭传输软件进程，使得数据传输中断

In the Box / 包装清单


Multifunctional Card Reader × 1	Carabiner × 1	Guarantee Card × 1
多功能读卡器	登山扣	保修卡

Product Details / 产品介绍

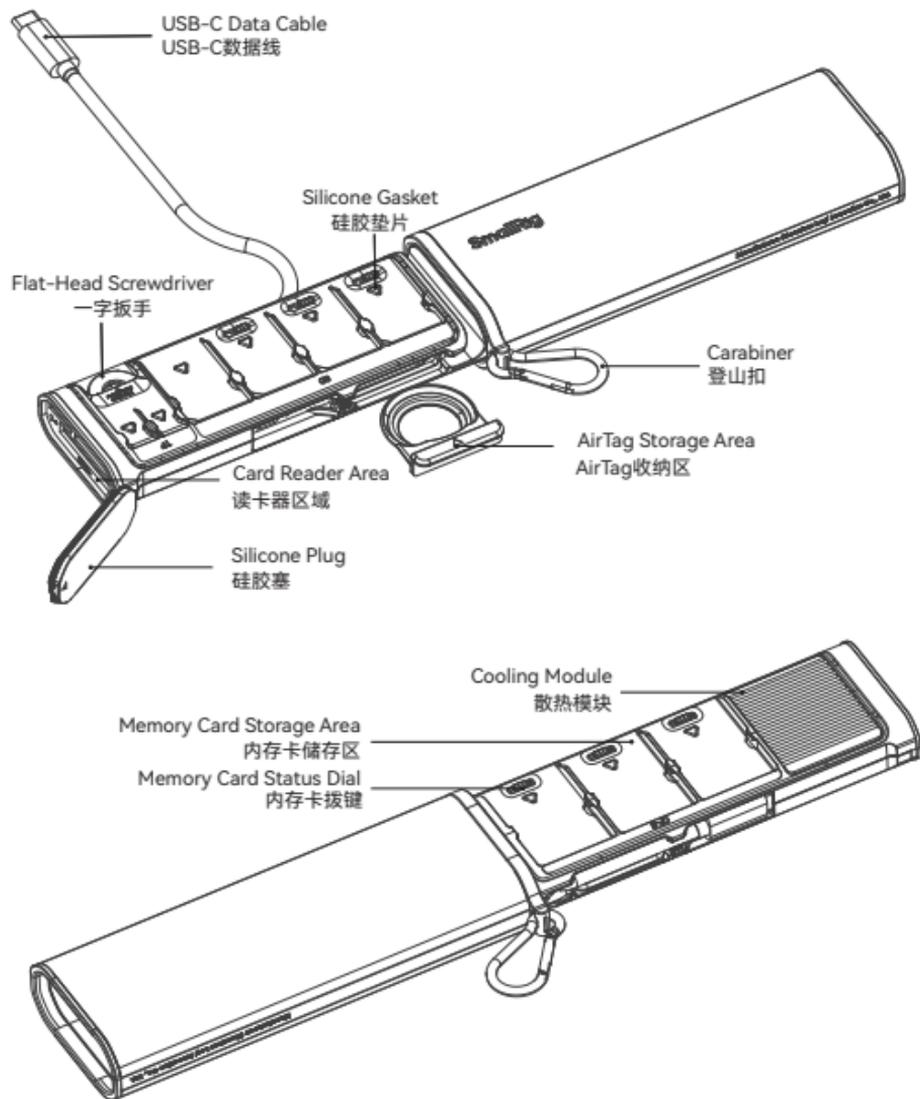


Installation / 安装步骤

1. Press the memory card case / 推出卡盒

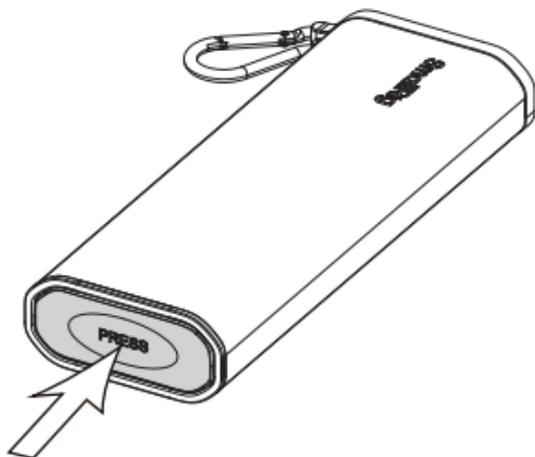


2. Remove the memory card / 取出内存卡

- ① Storing and removing memory cards
存取内存卡

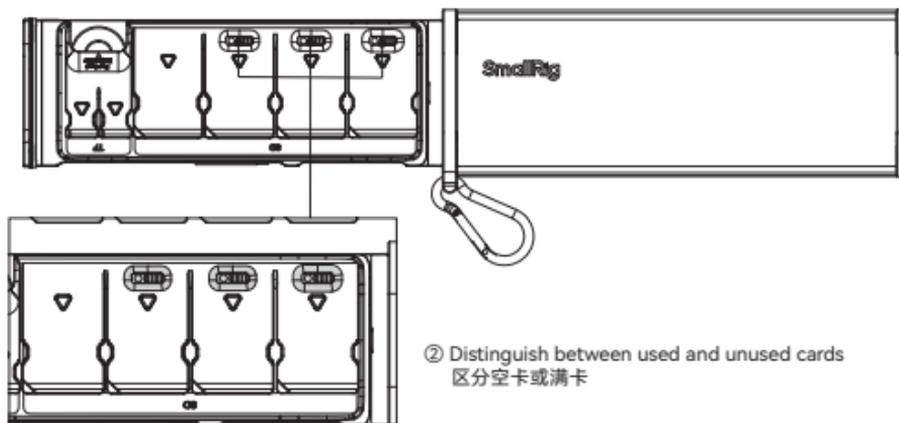


- ② Distinguish between used and unused cards
区分空卡或满卡


3. Open the silicone plug and insert the memory card into the card slot
打开硅胶塞，将内存卡插入卡槽

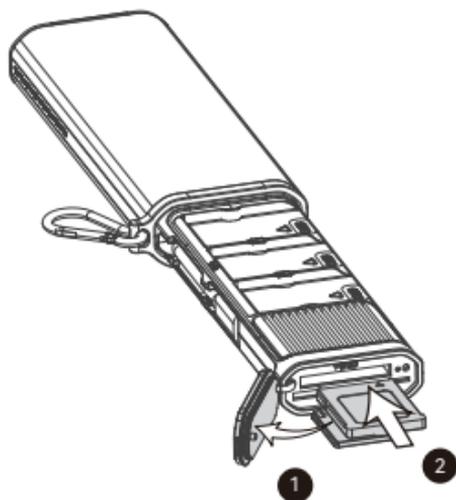

4. Pull out the USB-C data cable
取出USB-C线

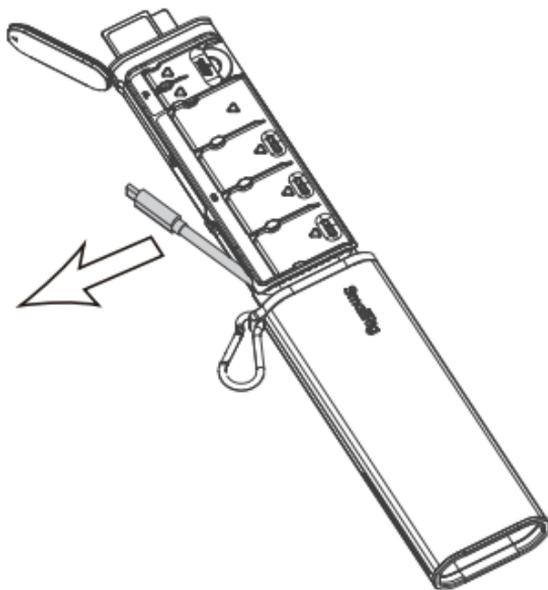


5. Connect your device / 连接设备，数据传输

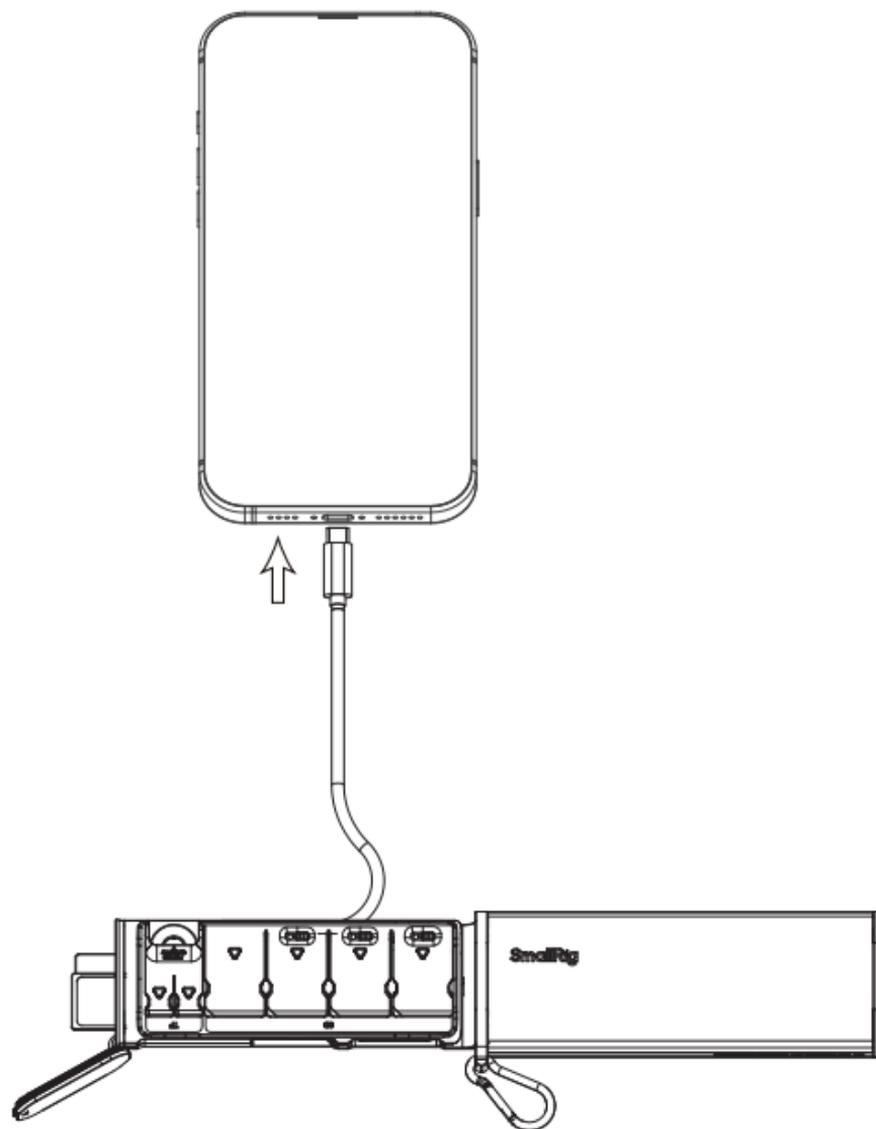

Note: Install the card reader after inserting the memory card, otherwise it cannot be read normally.

注意：插入存储卡后再安装读卡器，否则无法正常读取

6. When finished using, disconnect first, then unplug the USB-C cable.
断开连接，拔出USB-C线
7. Remove the memory card and close the silicone plug
取出内存卡，合上收纳

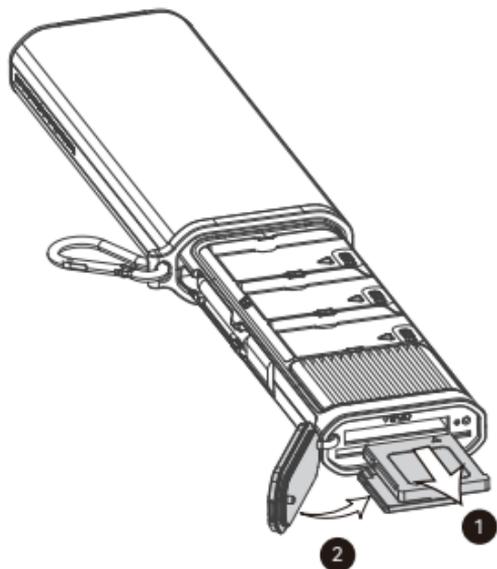


Note / 注意

1. Directly unplug the card reader (no pop-up notification) on the IOS system.
苹果系统无弹窗提示，直接拔除即可
2. Click on the "Safe Removal" before unplugging the card reader
安卓系统点击安全移除提示后再移除读卡器
3. Click the "Safely Remove Hardware" prompt on your laptop before removing the card reader
笔记本点击安全移除提示后再移除读卡器
4. Disconnect the card reader before removing the memory card to avoid data loss
移除读卡器后再取出存储卡，否则会有数据丢失的风险

Airtag Installation / Air Tag 安装步骤

- 1 Pull out the USB-C cable
取出USB-C线
- 2 Pull out the AirTag silicone plug
取出AirTag硅胶塞
- 3 Insert the AirTag
放入AirTag即可完成安装

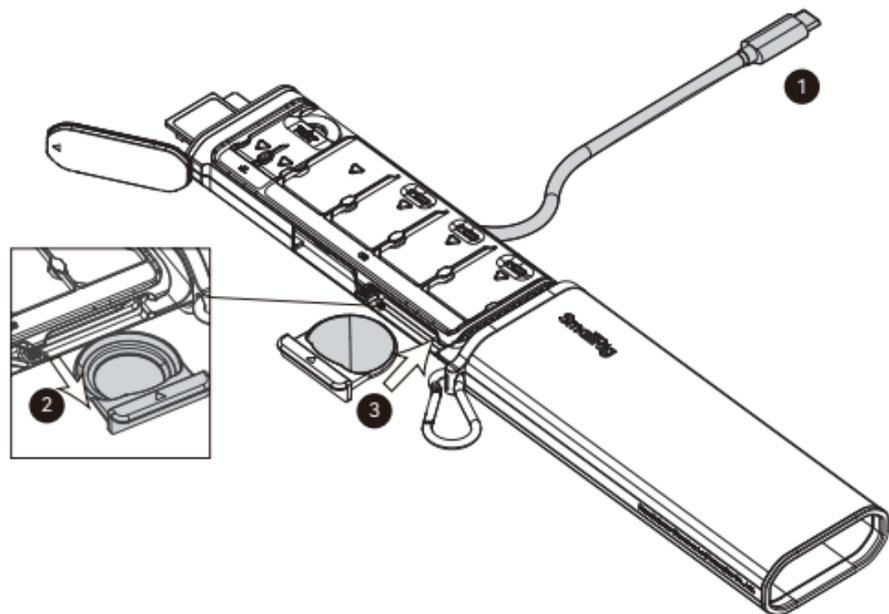

Compatibility / 适配性

1. USB: 3.2 Gen2 (10Gbps / 1250MB/s), backward-compatible with 3.1 / 3.0 / 2.0
兼容USB 3.2 Gen2传输标准，最高支持10Gbps（即1250MB/s）并向下兼容USB 3.1、USB 3.0、USB 2.0传输协议
2. SD Cards: UHS-II (SD / SDXC / SDHC, up to 312MB/s), UHS-I compatible.
Micro SD: UHS-II (Micro SD / SDXC / SDHC, up to 312MB/s), UHS-I compatible.
兼容SD 4.0 UHS-II标准的SD、SDXC、SDHC卡和Micro SD、Micro SDXC、Micro SDHC卡，最高支持312MB/s，并向下兼容UHS-I标准的SD、SDXC、SDHC卡和Micro SD、Micro SDXC、Micro SDHC卡

Specifications / 产品参数

4532

Product Dimensions 产品尺寸	6.5 × 2.6 × 1.1 in 165.0 × 66.3 × 27.2 mm
Product Weight 产品重量	8.3 ± 0.2oz 235.0 ± 5.0g
Material (s) 主要材质	ABS, Aluminum Alloy, PU Leather ABS、铝合金、PU皮革
Model 型号	CFE-B
USB-C Input USB-C 输入	5V=3 A, 9V=3A, 12 V=3 A, 20 V=5 A

5361

Product Dimensions 产品尺寸	6.5 × 2.6 × 1.1 in 165.0 × 66.3 × 27.2 mm
Product Weight 产品重量	8.3 ± 0.2oz 235.0 ± 5.0g
Material (s) 主要材质	ABS, Aluminum Alloy, PU Leather ABS、铝合金、PU皮革
Model 型号	CFE-A
USB-C Input USB-C 输入	5V=3 A, 9V=3A, 12 V=3 A, 20 V=5 A

Specifications subject to change without prior notice. Please refer to the physical product for the most up-to-date information.

* 技术参数如有改动，以实物为准，恕不另行通知。

Manufacturer Email: support@smallrig.com

Manufacturer: Shenzhen Leqi Innovation Co., Ltd.

制造商: 深圳市乐其创新股份有限公司

Add: Rooms 101, 701, 901, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road,
Dafu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

地址: 中国广东省深圳市龙华区观澜街道大富社区平安路58号共联富基创新园4栋101、701、901

Consignor: Shenzhen LC Co., Ltd.

委托商: 深圳市乐长科技有限公司

Add: Room 201, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road,
Dafu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

地址: 中国广东省深圳市龙华区观澜街道大富社区平安路58号共联富基创新园4栋201



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !



Séparez les éléments avant de trier



执行标准: GB 4943.1-2022

Made in China | 中国制造