

SmallRig



"Black Mamba" Cage for Panasonic G9 II / S5 II / S5 IIX

Operating Instruction

SmallRig "Black Mamba" Cage for Panasonic LUMIX G9 II / S5 II / S5 IIX 4023 is designed to protect camera and attach accessories. It locks the camera via one bottom 1/4"-20 screw and two side lock adapters, with rubber pads preventing scratches and features "Black Mamba" style as a whole that gives full access to all top controls. Among the accessory mounting points, 1/4"-20 holes support Side Handle 2093B; the front 1/4"-20 locating hole suits Rod Clamp 3276 for follow focus system; and the ARRI 3/8"-16 locating hole fits Top Handle 3786 or Monitor Mount 2903B. It also comes with a left NATO rail for Side Handle 3847; cold shoe mounts to attach microphone, LED video light; and a bottom QD socket to install QD shoulder strap. At the bottom there is an Arca-Swiss quick-release plate, suitable for DJI RS 2 / RSC 2 / RS 3 / RS 3 Pro gimbals and Arca-Swiss tripods, as well as a threaded hole for quick-release plate (riser pad) of DJI RS 2 / RSC 2 and Arca-Type Quick Release Plate 3154. The item also features strap holes on both sides and the bottom, which are compatible with Hand Strap 3848, Shoulder Strap PSC2428, etc. Besides, a magnetic wrench is included for easy disassembly and assembly.

Safety Guidelines

1. Environment

Do not use the product underwater, in extreme temperatures (e.g., freezing or direct heat), corrosive environments, or excessive dust. Dry metal parts immediately after liquid contact to prevent corrosion.

2. Load Capacity

Do not exceed the maximum weight capacity indicated on the product. Overloading risks structural failure, deformation, or accidental drops.

3. Cleaning & Maintenance

Clean surfaces with a dry, soft cloth. Avoid chemicals like alcohol or solvents. Ensure dry and ventilated conditions for long-term storage.

4. Structural Integrity

Do not modify the product (e.g., drilling, cutting)—this compromises structural integrity and increases drop risks.

5. Malfunctions


Stop use immediately if you notice deformation, unusual noises, or loose components, and contact support.

In the Box

Guarantee Card × 1

Cage × 1

Product Details

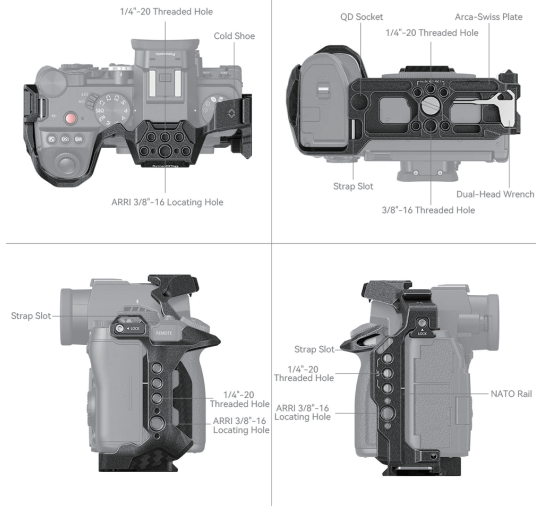

Installation Guide

STEP 1



Remove the two side lock adapters on the cage with an included dual-head wrench.

STEP 2




Put the camera into the cage from back to the front.

STEP 3



Secure the cage via tightening the 1/4"-20 screw.

STEP 4

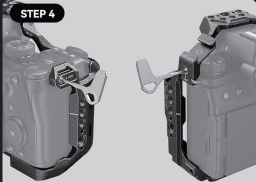

Secure the cage and camera strap slots via tightening the side lock adapter on each side.



Three Point Lock System

The 1/4"-20 locking screw at the bottom has built-in threads, which can be directly installed on the tripod without removing the leather case



Specifications



Product Dimensions: 147.5 × 72.8 × 117.5mm

Package Dimensions: 175 × 143 × 83mm

Product Weight: 157g ± 5g

Package Weight: 280 ± 5.0g

Material(s): Aluminum Alloy

Manufacturer Email: support@smallrig.com

Manufacturer: Shenzhen Leqi Innovation Co., Ltd.

Add: Rooms 101, 701, 901, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

Consignor: Shenzhen LC Co., Ltd.

Add: Room 201, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

RoHS

CE



FR
LE TRI
+ FACILE



Séparez les éléments avant de trier



Made in China